

NOTES:

1. ELECTRICAL:

- 1.1 CONTACT CAPACITY .25 A @ 60 VAC., 3 VA MAXIMUM.
- 1.2 CONTACT RESISTANCE 30 OHM MAX.

2. OPERATE:

- 2.1 MAXIMUM DIFFERENTIAL ANGLE 15 DEG.
- 2.2 OPERATE TEMPERATURE RANGE -20 DEG. F. TO 175 DEG. F.




3. HOUSING MATERIAL ABS COLOR BLUE.

**4. LEADS 10" LONG PVC INSULATION
2 CONDUCTOR WITH OUTER JACKET.**

**5. MOUNTING HOLES WILL ACCEPT SCREWS
UP TO .125 (3.17) DIA.**

6. ALL DIMENSIONS IN INCHES AND (mm).

REV.	DATE	REVISION RECORD	DR.
A	05/15 2000	ORIGINAL	S.H.

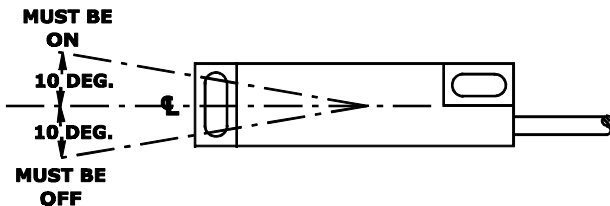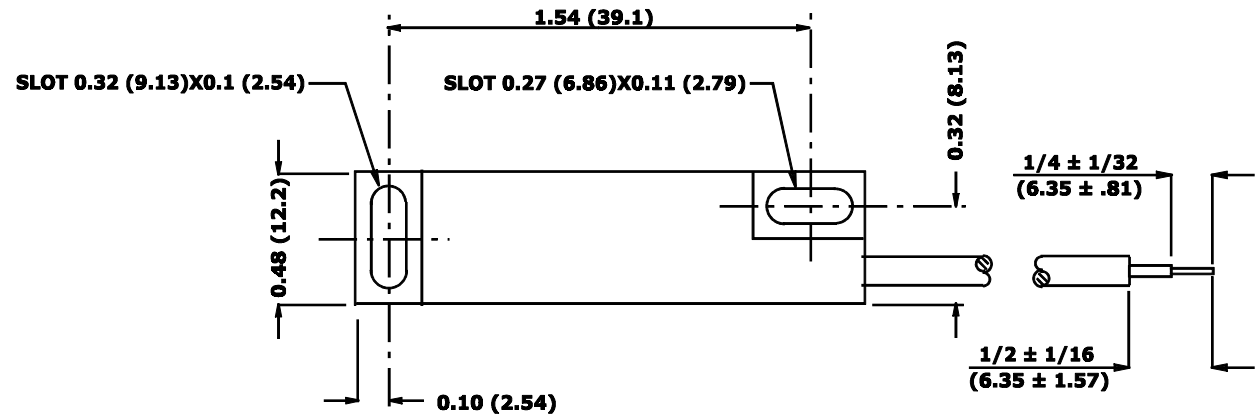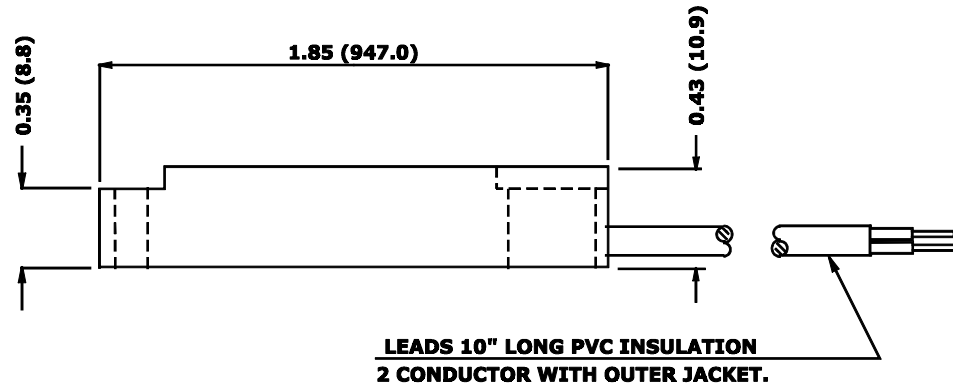

COMUS INTERNATIONAL

454 ALLWOOD RD. CLIFTON, NJ 07012 U.S.A. PH. (973) 777 - 6900

TOLERANCES (except as noted) DECIMAL + .01 (.254) 2 Digit - .005 (.127) 3 Digit FRACTIONAL ± 1/64 (.397) ANGULAR ± 1/2 °	REF.:	SCALE: NONE	DRAWN BY: S.H.	APPROVED:
	DATE:			
TITLE: ENCAPSULATED NON - MERCURY TILT SWITCH		DATE: 05/15/00	DRAWING NUMBER:	CW1300-90