


Part Number: CW1300-7
Tilt Switch Assembly
Product Data Sheet

PICTURE



OPERATION

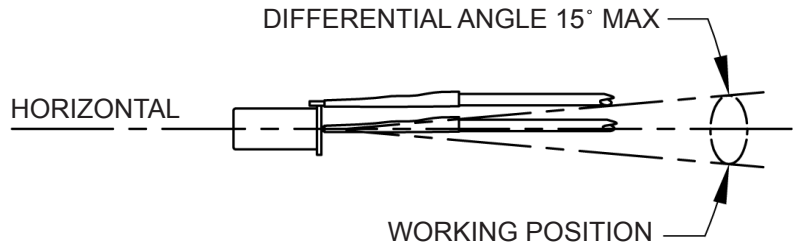


FEATURES

- Resistant to Ambient Environmental Conditions
- Case Material : Tin Plated
- Hermetically Sealed & Inert Gas Filled
- Wire : #26 AWG, 105°C PVC Insulation, with Connector JST PH 2 Pins at the end.
- Pin 1 Connected on the Center Pin of Switch, Pin 2 on Body of Switch

✓ **RoHS Compliant**

DIMENSIONS

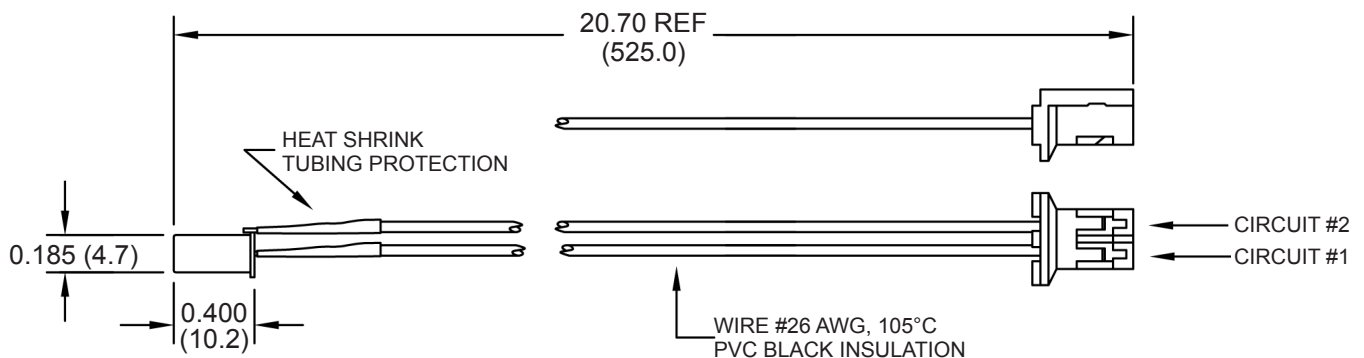

Drawings not to scale.
 All dimensions in inches (mm) nominal.

SPECIFICATION

Contact Capacity	60 Volts MAX, 0.25 A MAX, 3 VA MAX
Contact Resistance	30 Ω MAX
Differential Angle	15° MAX
Operating Temperature	-37° to 100°C

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405