









Wide Angle Power Tilt Switch


Product Data Sheet

PICTURE










- Two Wire Smart Sensor
- · Reconfigurable at Factory
- · Circuitry Epoxy Encapsulated
- Reverse Polarity and Transient Protected (58V / 600W)


✓ RoHS Compliant

DIMENSIONS

Drawings not to scale. All dimensions in inches (mm) nominal.



1.072

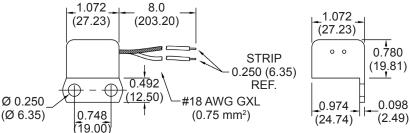

SPECIFICATION	
Operating Voltage MAX	58 VDC
Operating Voltage MIN	1.0 VDC
Current MAX	2.0 Amps
Current MIN	0.05 Amps
MAX Power	2.0 Watts
MAX Inrush	10 Amps
Operating Temperature	-40° to +125°C
Storage Temperature	-40° to +125°C
Load	Resistive, Inductive, Capacitive, Tungsten

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405