

RI-23GP Series Dry Reed Switch

14.0 mm, 1 Form A, 10 Watt



✓ RoHS Compliant

RI-23GP Series


Micro dry-reed switch hermetically sealed in a gas-filled envelope. Single-pole, single-throw (SPST) type, having normally open contacts, and containing two magnetically actuated reeds.

The switch is of the double-ended type and may be actuated by an electromagnet, a permanent magnet or a combination of both. The device is intended for use in sensors, relays, pulse counters or similar devices.

RI-23GP Series Features

- General purpose reed switch
- Contact layers: gold, plated ruthenium
- Superior glass-to-metal seal and blade alignment
- Excellent life expectancy and reliability
- UL File #E125629

Dimensions for RI-23GP Series

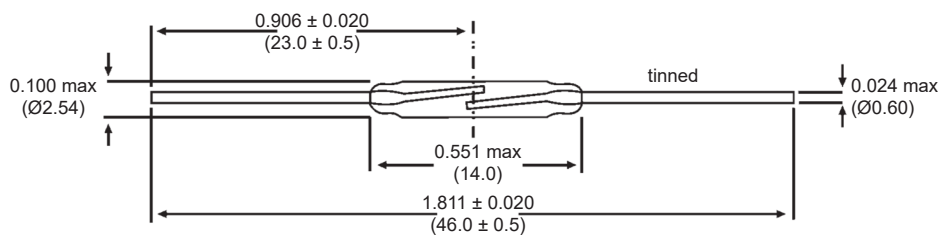

All Dimension in inches (mm) nominal

General data for all models RI-23GP

AT-Customization / Performed Leads

Besides the standard models, customized products can also be supplied offering the following options:

- Operate and release ranges to customer specification
- Cropped and/or performed leads

Life expectancy and reliability

The life expectancy data given below are valid for a coil energized at 1.25 times the published maximum operate value for each type in the RI-23GP series.

No load conditions (operating frequency: 100Hz)

Life expectancy: min. 10^8 operations with a failure rate of less than 10^{-9} with a confidence level of 90%.

End of life criteria:

- Contact resistance > 1Ω after 2 ms
- Release time > 2 ms (latching or contact sticking).

Loaded conditions (resistive load: 12V; 4 mA; (15 mA peak); operating frequency: 170 Hz)

Life expectancy: min. 10^7 operations with a failure rate of less than 10^{-8} with a confidence level of 90%.

End of life criteria:

Contact resistance > 2Ω after 4 ms

Release time > 0.7 ms (latching or contact sticking).

Switching different loads involves different life expectancy and reliability data. Further information is available on request.

Mechanical Data

Contact arrangement is normally open; lead finish is tinned; net mass is approximately 190mg; and can be mounted in any position.

Shock

The switches are tested in accordance with “IEC 68-2-27”, test Ea (peak acceleration 150 G, half sinewave; duration 11 ms). Such a shock will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

Technical Specifications

Parameters	Test Conditions	Units	RI-23GP-XXXX				
Operating Characteristics							
Operate Range		AT*	10-15	15-20	20-25	25-30	30-35
Release Range		AT*	4-14	7-17	8-23	12-28	16-32
Operate Time - including Bounce (typ.)		ms	0.1	0.25	0.25	0.25	0.25
Bounce Time (typ.)		ms	0.05	0.15	0.15	0.15	0.15
Release Time (max)		μs	70	30	30	30	30
Resonant Frequency (typ.)		Hz	5500	5500	5500	5500	5500
Electrical Characteristics							
Switched Power (max)		W	10	10	10	10	10
Switched Voltage DC (max)		V	200	200	200	200	200
Switched Voltage AC, RMS value (max)		V	140	140	140	140	140
Switched Current DC (max)		mA	250	500	500	500	500
Switched Current AC, RMS value (max)		mA	250	500	500	500	500
Carry Current DC (max)		A	1	1.5	2.5	2.5	2.75
Breakdown Voltage (min)		V	225	325	325	375	500
Contact Resistance (initial max.)		mΩ	100	100	100	100	100
Contact Resistance (initial typ.)		mΩ	70	70	70	70	70
Contact Capacitance (max)	without test coil	pF	0.3	0.3	0.25	0.25	0.25
Insulation Resistance (min)	RH ≤ 45%	MΩ	10 ⁶	10 ⁶	10 ⁶	10 ⁶	10 ⁶

*AT values are based on full length, measured using Philips Standard Coil (PSC).

Parameters	Test Conditions	Units	RI-23GP-XXXX			
Operating Characteristics						
Operate Range		AT*	35-40	40-45	45-50	50-55
Release Range		AT*	18-37	20-42	22-47	24-52
Operate Time - including Bounce (typ.)		ms	0.25	0.25	0.25	0.25
Bounce Time (typ.)		ms	0.15	0.15	0.15	0.15
Release Time (max)		μs	30	30	30	30
Resonant Frequency (typ.)		Hz	5500	5500	5500	5500
Electrical Characteristics						
Switched Power (max)		W	10	10	10	10
Switched Voltage DC (max)		V	200	200	200	200
Switched Voltage AC, RMS value (max)		V	140	140	140	140
Switched Current DC (max)		mA	500	500	500	500
Switched Current AC, RMS value (max)		mA	500	500	500	500
Carry Current DC (max)		A	2.5	2.5	2.5	2.75
Breakdown Voltage (min)		V	400	400	500	500
Contact Resistance (initial max.)		mΩ	100	100	100	100
Contact Resistance (initial typ.)		mΩ	70	70	70	70
Contact Capacitance (max)	without test coil	pF	0.25	0.25	0.25	0.25
Insulation Resistance (min)	RH ≤ 45%	MΩ	10 ⁶	10 ⁶	10 ⁶	10 ⁶

*AT values are based on full length, measured using Philips Standard Coil (PSC).

Vibration

The switches are tested in accordance with “IEC 68-2-6”, test Fc (acceleration 10G; below cross-over-frequency 57 to 62 Hz; amplitude 0.75 mm; frequency range 10 to 2000 Hz; duration 90 minutes.) Such a vibration will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

Mechanical Strength

The robustness of the terminations is tested in accordance with “IEC 68-2-21”, test Ua1 (load 40 N).

Operating and Storage Temperature

Operating ambient temperature; min: -55°C; max: +125°C. Storage temperature; min: -55°; max: +125°C. Note: Temperature excursions up to 150°C may be permissible. For more information contact your nearest Comus Group sales office.

Soldering

The switch can withstand soldering heat in accordance with “IEC 68-2-20”, test Tb, method 1B: solder bath at 350 ± 10°C for 3.5 ± 0.5 s. Solderability is tested in accordance with “IEC 68-2-20” test Ta, method 3: solder globule temperature 235°C; ageing 1b: 4 hours steam.

Welding

The leads can be welded.

Mounting

The leads should not be bent closer than 1 mm to the glass-to-metal seals. Stress on the seals should be avoided. Care must be taken to prevent stray magnetic fields from influencing the operating and measuring conditions.

Ordering Information

RI-23GP - XXXX	
	AT Ranges
Series	1015
	1520
	2025
	2530
	3035
	3540
	4045
	5055

* As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.