







Part Number: 38 Series

General Purpose - 1 Form A / 2 Form A - PhotoDMOS Relays 600 VOLTS

Product Data Sheet





PICTURE


















Drawings not to scale. All dimensions in mm nominal. Pitch: 2.54 mm

✓ RoHS Compliant

ORDERING INFORMATION

Body Style	Series	Options
AB = 4 pin AA = 6 pin AC = 8 pin	38	F = SMD S = SOP R1 = Tape & Reel (SMD / SOP Only) H = 5KV I/O BV (DIP / SMD Only) H = 3.75KV I/O BV (SOP Only)

Part Number Example: XX38X-XX

AC38F-R1 = Series 38, 2 Form A, 8 Pin, SMD with tape and reel packaging

FEATURES

- TOWARD PhotoDMOS Relays
- 600 Volt. 80 mA
- On-Resistance: 40 Ω (typical)
- I/O Breakdown Voltage: SOP 1500 Vrms Min.

DIP / SMD 3750 Vrms Min.

- Optional High I/O BV: SOP 3750 Vrms Min. DIP / SMD 5000 Vrms Min.
- Max LED Current 3.0 mA
- Low Off-State Leakage Current 1.0 µ A Max
- UL File E344988 c **Flus**

SCHEMATIC


AB38(F)(S)

1: Anode (LED) 2: Cathode (LED)

(+)


3, 4: Drain (MOS FET)

AA38(F)



- 1: Anode (LED) 2: Cathode (LED)
- 3: NC
- 4, 6: Drain (MOS FET) 5: Source (MOS FET)

AC38(F)(S)



- (LED) 1, 3: Anode
- 2, 4: Cathode (LED)
- 5, 6, 7, 8: Drain (MOS FET)

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900









Part Number: 38 Series

General Purpose - 1 Form A / 2 Form A - PhotoDMOS Relays 600 VOLTS

Product Data Sheet



ABSOLUTE MAXIMUM RATINGS (Ambient Temperature: 25°C)								
ITEM SYMBOI			VALUE					
OUTLINE PACKAGE			SOP 4/8		DIP 4/8 SMD 4/8		DIP 6 SMD 6	
			1CH	2CH	1CH	2CH	1CH	
	Continuos LED Current	lF	50 mA					
Input	Peak LED Current (f=100 Hz, duty=1%)	IFP	500 mA					
	LED Reverse Voltage	VR	5 V					
	Input Power Dissipation	Pln	75 mW					
Output	Load Voltage	VL	600 V (AC peak or DC)					
	Load Current (mA)	IL	70	60	80	70	80	
	Peak Load Current (1 ms, 1 shot) (mA)	I Peak	200	200	200	200	200	
	Output Power Dissipation (mW)	Pout	300	450	450	600	450	
Total Power Dissipation (mW)		Рт	350	500	500	650	500	
I/O Breakdown Voltage (Vrms)		V _{I/O}	1500	1500	3750	3750	3750	
Operating Temperature		Topr	-40° +85°C					
Storage Temperature		Tstg	-40° +100°C					

ELECTRICAL SPECIFICATIONS (Ambient Temperature: 25°C)								
ITEM		SYMBOL	MIN	TYP	MAX	UNITS	CONDITIONS	
Input	LED Forward Voltage	VF	1.0	1.17	1.5	V	I _F = 10mA	
	Operation LED Current	IF On		1.0	3.0	mA		
	Recovery LED Voltage	VF Off	0.5	1.0		V		
Output	On-Resistance Drain to Drain	Ron		40	60	Ω	I _F = 5mA I _L = Rating Time to flow is within 1 sec.	
	Off-State Leakage Current	Leak			1.0	μA	VL= 600V	
	Output Capacitance	Cout		47		pF	V _L = 0V, f= 1MHz	
Transmission	Turn-On Time	Ton		0.2	0.5	ms	I _F = 5mA	
	Turn-Off Time	Toff		0.05	0.2	ms	IL = Rating (for SOP type)	
	Turn-On Time	Ton		0.1	1.0	ms	I _F = 10mA	
	Turn-Off Time	Toff		0.05	0.5	ms	I∟= Rating (for DIP/SMD type)	
Coupled	I/O Insulation Resistance	Rı/o	10 ⁹			Ω		
	I/O Capacitance	Cı/o		1.3		pF	f = 1MHz	

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405










Part Number: 38 Series

General Purpose - 1 Form A / 2 Form A - PhotoDMOS Relays 600 VOLTS

Product Data Sheet



GRAPHS

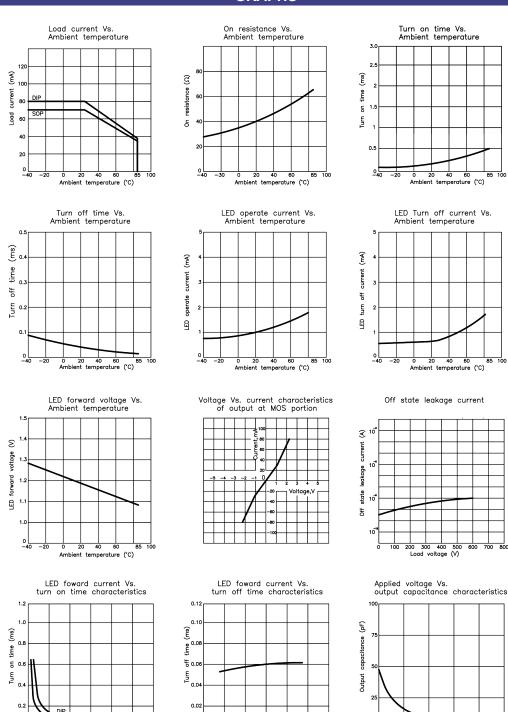

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

LED foward current (mA)

LED foward current (mA)

Applied voltage (V)